


Product Details


RIGID SOLAR PANEL SGM2-65W



MC4

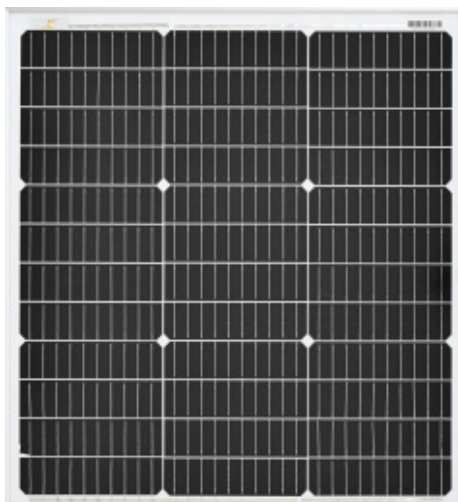


Aluminum frame



Tempered glass

Module Diagram

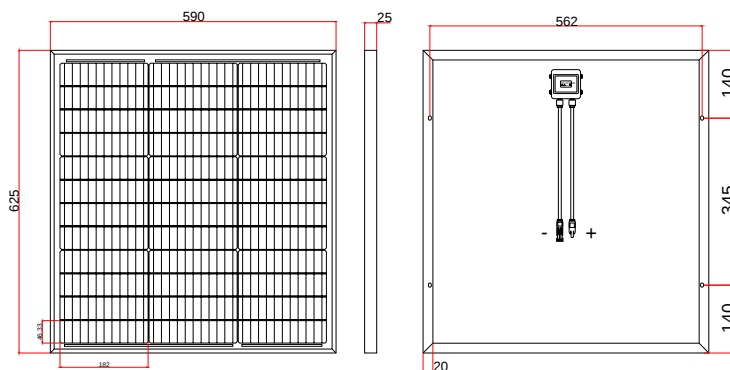

Electrical Characteristics


Maximum power(Pmax)	65W
Open-circuit voltage(Voc)	24.5V
Voltage at Pmax(Vmp)	20.9V
Short-circuit current(Isc)	3.27A
Current at Pmax(Imp)	3.12A
Cells Efficiency(%)	22.7%
The maximum system voltage	600V DC(IEC)
Power temperature coefficient	-0.35%/
Voltage temperature coefficient	-0.275%/
Current temperature coefficient	0.045%/
Output power tolerance	±3%
Operating Temperature	-40 ~85

Specifications

Solar cell brand	A grade mono solar cells 182mm
No.of cells and connections	36(3*12)
Module dimension	625*590*25mm
Weight	4.9KG
Output cable	PV-XC0806(1pcs 10SQ050 diode) 900mm/2.5mm ² cable+MC4
Approvals	IP65
Certifications	CE, ROHS, FCC

Product Introduction

On the 182 mm single solar cell, the unique front, and back electrode pattern design improves the mechanical load of the module and reduces the fragmentation rate in the production of the module; combined with the excellent anti-PID performance, it ensures the stability of the power generation of the module, effectively The conversion efficiency of the module is improved.

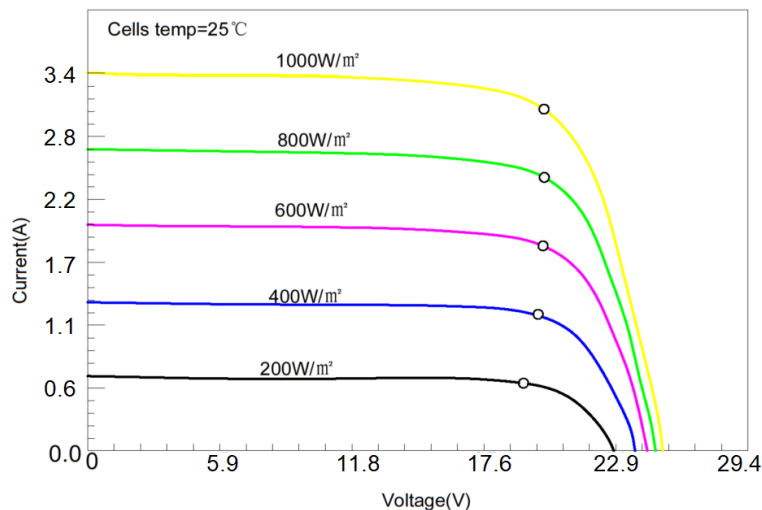

*SUNGOLD offer customize service, please refer to our website or ask SUNGOLD workers for more sizes and the latest parameters.