


Product Details

RIGID SOLAR PANEL


SGM2-220w

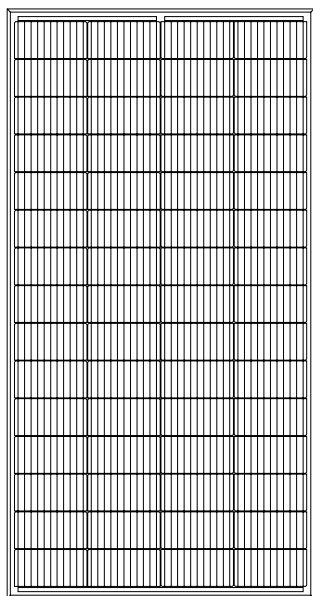

MC4




Aluminum frame



Tempered glass

Module Diagram

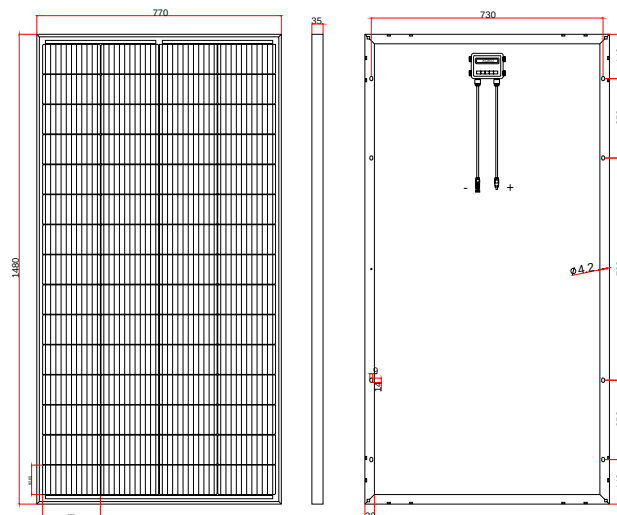

Electrical Characteristics

Maximum power(Pmax)	220W
Open-circuit voltage(Voc)	20.4V
Voltage at Pmax(Vmp)	17.4V
Short-circuit current(Isc)	13.28A
Current at Pmax(Imp)	12.65A
Cells Efficiency(%)	22.7%
The maximum system voltage	1000V DC(IEC)
Power temperature coefficient	-0.35%/
Voltage temperature coefficient	-0.275%/
Current temperature coefficient	0.045%/
Output power tolerance	±3%
Operating Temperature	-40 ~-85

Specifications

Solar cell brand	A grade mono solar cells 182mm
No.of cells and connections	60(4*15)
Module dimension	14800*770*35mm
Weight	11.3KG
Output cable	2*diodes + 900mm/4mm² cable+MC4 compatible
Approvals	IP65
Certifications	CE, ROHS, FCC

*SUNGOLD offer customize service, please refer to our website or ask SUNGOLD workers for more sizes and the latest parameters.

Product Introduction

On the 182 mm single solar cell, the unique front, and back electrode pattern design improves the mechanical load of the module and reduces the fragmentation rate in the production of the module; combined with the excellent anti-PID performance, it ensures the stability of the power generation of the module, effectively The conversion efficiency of the module is improved.

