



## BLUE DYNAMIC

### Key benefits

- Designed for vehicles of all classes
- Optimal cold cranking power up to 110% compared to conventional batteries
- PowerFrame® technology
- Meets OE requirements

For more information visit [www.varta-automotive.com](http://www.varta-automotive.com)




### ORDER INFORMATION

|                          |                   |
|--------------------------|-------------------|
| European Type No. (ETN): | 595 404 083       |
| Article Number:          | 595 404 083 313 2 |
| Short Code:              | G7                |
| Barcode:                 | 4016987119716     |
| UK Code:                 | 335               |
| Packaging Unit:          | 1                 |
| Quantity per Pallet:     | 30                |

### TECHNICAL INFORMATION

|                                   |     |                     |        |
|-----------------------------------|-----|---------------------|--------|
| Voltage [V]:                      | 12  | Base Hold-down:     | B01    |
| Battery Capacity [Ah]:            | 95  | Layout:             | 0      |
| Cold Cranking Amps (CCA), EN [A]: | 830 | Terminal Types:     | 1      |
| Length [mm]:                      | 306 | Case Size:          | D31L   |
| Width [mm]:                       | 173 | Weight filled (kg): | 20,230 |
| Height [mm]:                      | 225 |                     |        |

## DRAWINGS



## POWERFRAME® - TECHNOLOGY



### Structurally strong


Built for strength, PowerFrame patented grid technology is up to 66% more durable and more corrosion resistant than other grid designs.

### Patterned for power

The PowerFrame grid design provides superior cranking power with up to 70% better electrical flow than other grid technologies.

### Clean construction

The PowerFrame grid design provides superior cranking power with up to 70% better electrical flow than other grid technologies.

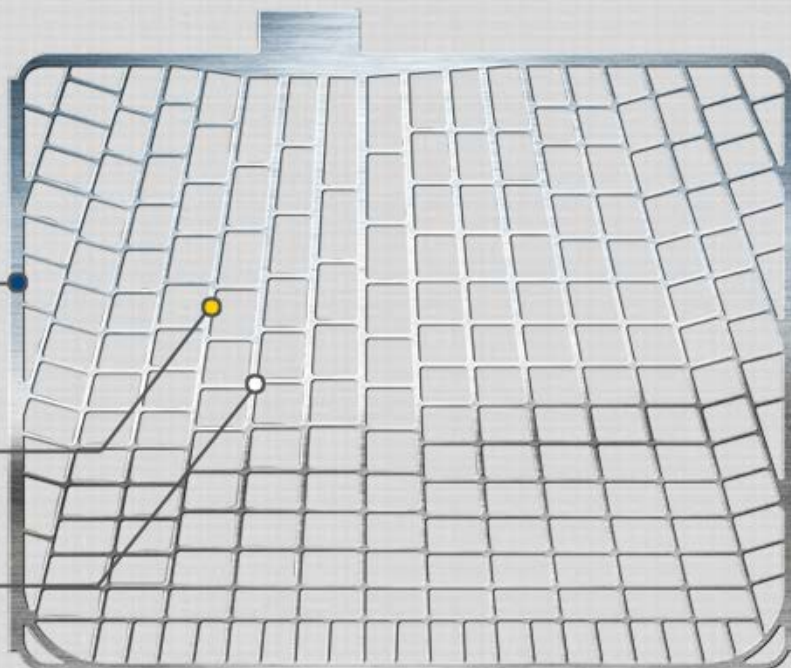

|   | <i>SILVER Dynamic</i>   | <i>BLUE Dynamic</i>      | <i>BLACK Dynamic</i>     |
|---|-------------------------|--------------------------|--------------------------|
| <b>Number of battery types</b>          | 11 types                | 25 types                 | 13 types                 |
| <b>Primary function</b>                 | Engine start            | Engine start             | Engine start             |
| <b>Cold cranking power</b>              | CCA 122%*               | CCA 110%*                | CCA 100%*                |
| <b>Battery technology</b>               | Flooded/SLI*            | Flooded/SLI              | Flooded/SLI              |
| <b>Positive grid/<br/>Negative grid</b> | PowerFrame® / Expanded  | PowerFrame® / Expanded   | PowerFrame® / Expanded   |
| <b>OE quality</b>                       | Exceeds OE requirements | Meets original equipment | Meets original equipment |

\*Compared to conventional batteries