

VARTA PROFESSIONAL AGM



- 3 to 4 times the cycling stability of conventional flooded batteries
- Dual Purpose - ideal for starting and supply applications
- Absolutely maintenance free and leak proof
- Minimum self discharge - ideal for seasonal use
- High mechanical stability through AGM technology for more shock and vibration resistance
- Maximum safety in usage through safety valves
- Low internal resistance through glass mat separators for improved charging acceptance and current output

EUROPEAN TYPE NO. (ETN)

840 095 085


ORDER INFORMATION

European Type No. (ETN):	840 095 085
Article Number:	840 095 085 C54 2
Short Code:	LA95
Barcode:	4016987142738
Packaging Unit:	1
Quantity per Pallet:	36


TECHNICAL INFORMATION

Voltage [V]:	12	Height [mm]:	190
Battery Capacity [Ah]:	95	Base Hold-down:	B13
Battery Capacity 5h [Ah]:	85	Layout:	0
Cold Cranking Amps (CCA), EN [A]:	850	Terminal Types:	1
Marine Cranking Amps (SAE) @ 0°C:	1063	Case Size:	H8/L5
Length [mm]:	353	Weight filled (kg):	26,4
Width [mm]:	175		

DRAWINGS

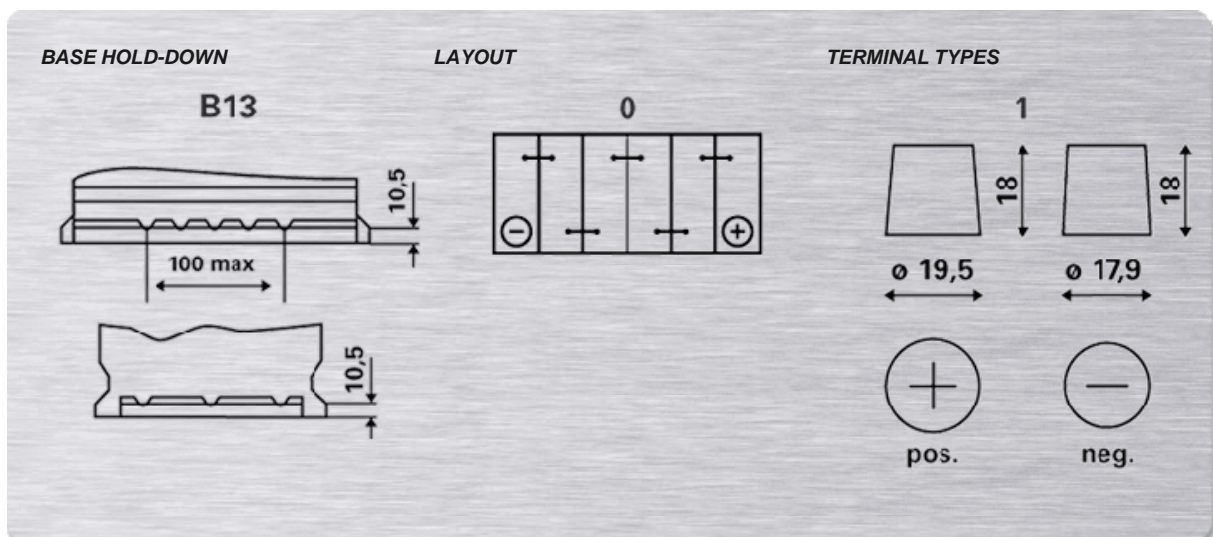

Discharge Curves

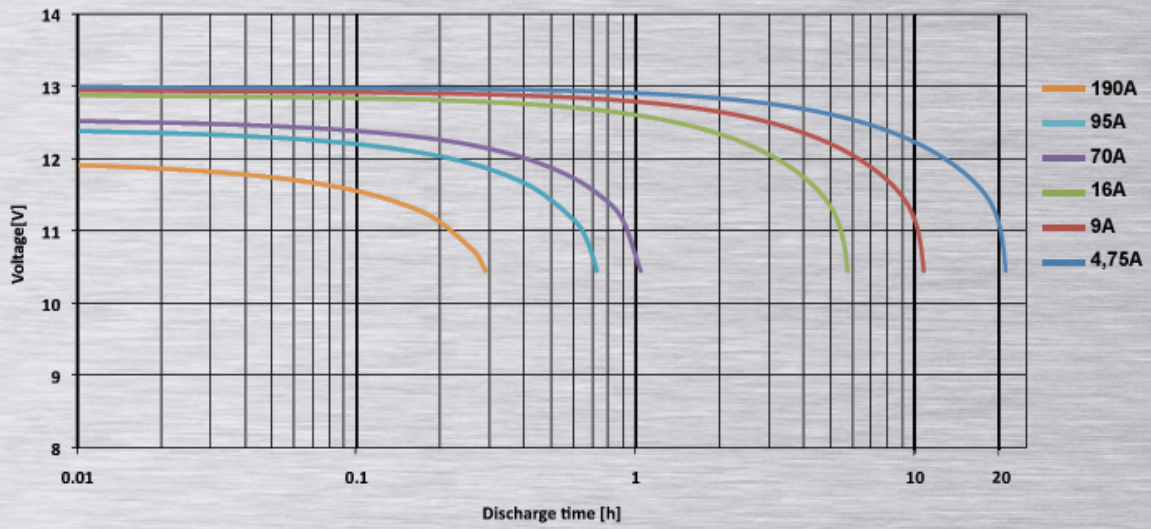

Individual results may vary